FIELD SPRAYER

SPECIFICATIONS
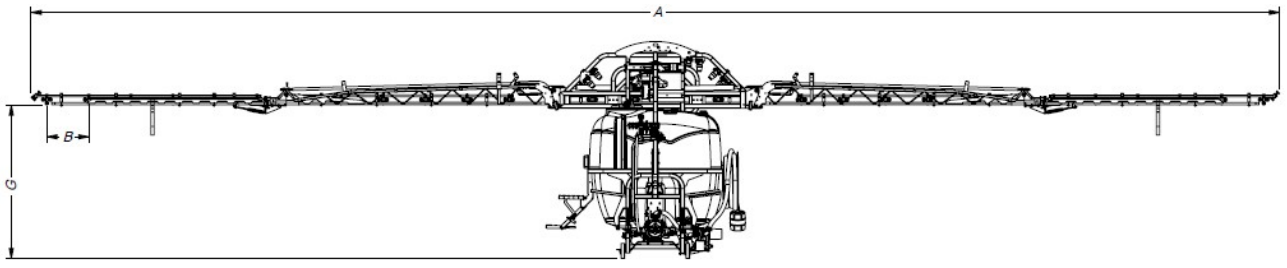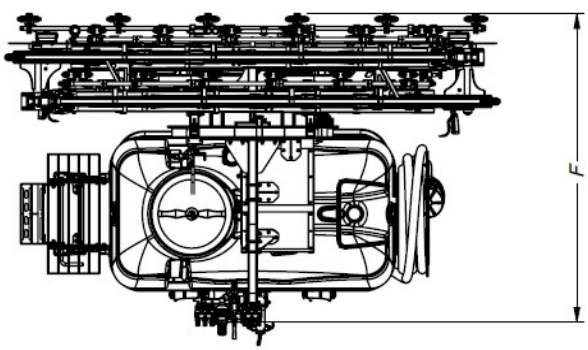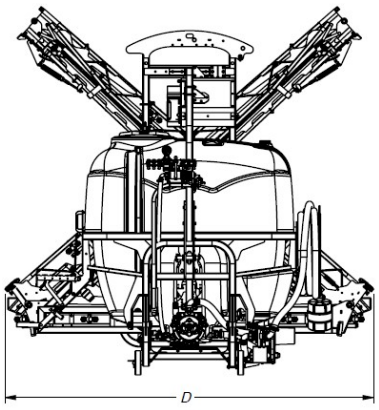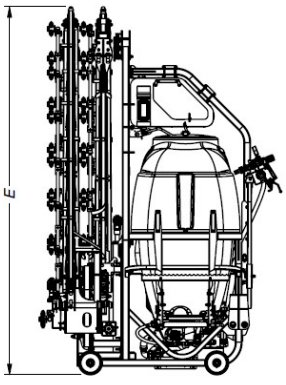
	S 12-08	S 12-10	S 12-12	S 15-08	S 15-10	S 15-12
Working Wdith (m)	12			15		
Number of Nozzle	24				30	
Nozzle Type Türü	Non-drip, quad nozzle with plastic body					
Chemical Tank Capacity (L)	800	1000	1200	800	1000	1200
Circuit Cleaning Tank Capacity (L)	50					
Hand Washing Tank Capacity (L)	15					
Linkage Cathegory	Cat-2					
(A) Boom Length (mm)	14.360				14.860	
(B) Nozzle Distance (mm)	500					
Boom Sections (No of Nozlles)	5 Section (3-6-6-6-3)				5 Section (6-6-6-6-6)	
(D) Transport Wdith (mm)	2780					
(E) Height (mm)	2780					
(F) Length (mm)	1700-2100					
Regulator	Annovi Revelberi UCM-6 (or equivalent)					
Pump	Annovi Revelberi AR-140 (or equivalent.)					
No of Diaphragm	3					
Max. Discharge Rate (l/min)	132,9					
Max. Working Pressurei (bar)	15					
Weight (kg)	781	801	821	793	813	833
Min Güç Gereksinimi (hp)	75	90	105	75	90	105
Min. – Max. Atım Miktarı (lt/da)	5 - 300					
Mixer	Hydraulic					
Filtration	260 l/min 3 way suction filter 180 l/min regolator filter Section filters for each boom sections Nozzle Filters					
Standards	Can cleaning, foldable ladder, signal lights, wheels