



ONIAR



As of January 2022 all Oniar trailers are available with EU whole vehicle type approval allowing Oniar trailers to be registered for use on public roads. The type approval is recognized by all EU member states and most of its neighboring countries which accept this regulation.

The EU regulation 167/2013 establishes a set of rules on safety and environmental protection for forestry and other agricultural vehicles. The regulation provides harmonized technical standards for the construction of towable vehicles and general requirements for obtaining type approval.

The maximum allowed driving speed on public roads is 30 km/h. To fulfill type approval requirements, the trailer must be equipped with either 2 wheel or 4 wheel hydraulic or pneumatic brake system, rear- and sidelights, reflectors and specific size wheels. Double-line hydraulic system and double-line pneumatic system Oniar trailers are suitable for most common tractor models sold in Europe.

Trailers are divided into 4 different groups based on the cross-section of the loading area and frame profile. Type approval is available to all possible brake combinations with and without a driving system. From trailer technical information it is possible to find each group-specific gross weight table. It presents the maximum allowed gross weight on public roads depending on the number of brakes, position of driving motors (front and/or rear axle) and the size of wheels intended for the trailer.

ONIAR





Technical information		34
Frame type		Single beam
Cross section of loading area	m ²	2,1
Frame profile	mm	200x200x8
Wheel hubs		80x80 - 6
Wheels		400/60-15,5
Suitable cranes		6800

Group 0 gross weight	
34	
2 brakes / 4 brakes	
10 000 kg / 13 000 kg	



TRAILER 34 | 400/60-15,5 | Ø 870

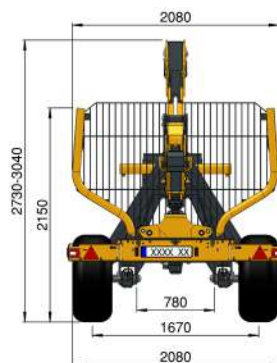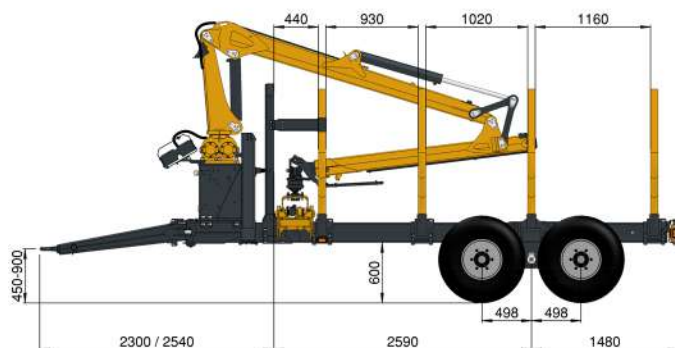

ONIAR





Technical information		134	137	142
Frame type		Double beam	Double beam	Double beam
Cross section of loading area	m ²	2,3	2,3	2,3
Frame profile	mm	2x(200x100x8)	2x(200x100x8)	2x(200x100x8)
Wheel hubs		80x80 - 6	80x80 - 6	90x90 - 8
Wheels		400/60-15,5	500/50-17	550/45-22,5
Suitable cranes		6800 / 8000	6800 / 8000 7500	6800 / 8000 7500 / 8750 / 8800

Group 1 gross weight		
134	137	142
2 brakes / 4 brakes		
10 000 kg / 13 500 kg	10 000 kg / 14 500 kg	12 500 kg / 15 500 kg
2 WD front axle : 2 brakes / 4 brakes		
---- / ----	6600 kg (pneumatic) / 9000 kg (pneumatic) 8000 kg (hydraulic) / 12 000 kg (hydraulic)	10 500 kg / 15 500 kg
2 WD rear axle : 2 brakes / 4 brakes		
---- / ----	10 000 kg / 12 000 kg	12 500 kg / 15 500 kg
4 WD : 2 brakes / 4 brakes		
---- / ----	6600 kg (pneumatic) / 9000 kg (pneumatic) 8000 kg (hydraulic) / 12 000 kg (hydraulic)	10 500 kg / 15 500 kg



Black Bruin motors		B240 / 2WD	B240 / 4WD	B250 / 2WD	B250 / 4WD
Torque (gross)	1m/Nm	12	24	15-27	30-54
Working pressure	bar	250	250	250-280	250-280
Max drive speed with WD	km/h	~ 3-5	~ 3-5	~ 3-5	~ 3-5
Max freewheeling speed	km/h	30	30	30	30

ONIAR



TRAILER 134 | 400/60-15,5 | Ø 875

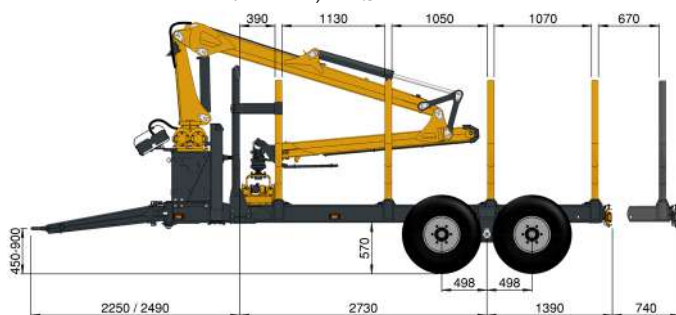


TRAILER 137 | 500/50-17 | Ø 945

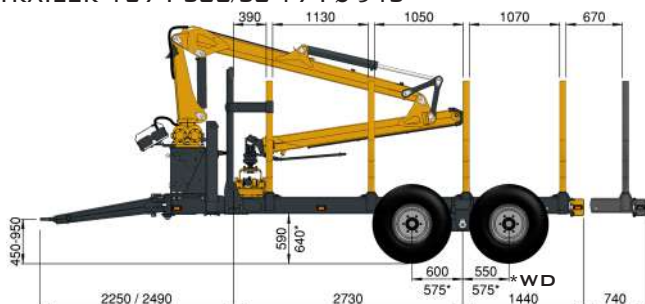

TRAILER 142 | 550/45-22,5 | Ø 1070

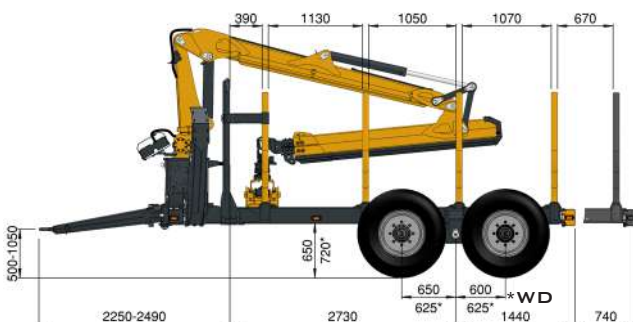

TRAILERS 134 / 137 / 142 FRAME WITH EXTRA POLES

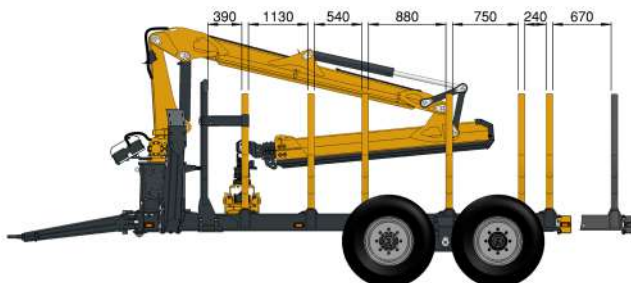

ONIA

TRAILERS 134 / 137 / 142 - GROUP 1





Technical information		237	242 / 242 R	246 / 246 R	246 e / 246 Re
Frame type		Double beam	Double beam extended (R)	Double beam extended (R)	Double beam extended (R)
Cross section of loading area - standard poles	m ²	2,6	2,6	2,6	2,6
Cross section of loading area - FW poles	m ²	----	2,4 - 5	2,4 - 5	2,4 - 5
Frame profile	mm	2x(200x120x8)	2x(200x120x8)	2x(200x120x8)	2x(200x120x8)
Wheel hubs	mm	80x80 - 6	90x90 - 8	100x100 - 8	100x100 - 8
Wheels		500/50-17	550/45-22,5	600/50-22,5	710/40-22,5 (e)
Suitable cranes		6800 / 8000 7500	6800 / 8000 7500 / 8750 / 8800	6800 / 8000 7500 / 8750 / 8800	6800 / 8000 7500 / 8750 / 8800

Group 2 gross weight			
237	242 / 242 R	246 / 246 R	246 e / 246 Re
2 brakes / 4 brakes			
10 000 kg / 15 000 kg	12 500 kg / 17 000 kg	12 500 kg / 18 000 kg	12 500 kg / 15 000 kg
2 WD front axle : 2 brakes / 4 brakes			
6600 kg (pneu) / 9000 kg (pneu) 8000 kg (hydr) / 12 000 kg (hydr)	10 500 kg / 16 000 kg	10 500 kg / 17 000 kg	10 500 kg / 15 000 kg
2 WD rear axle : 2 brakes / 4 brakes			
10 000 kg / 12 000 kg	12 500 kg / 16 000 kg	12 500 kg / 17 000 kg	12 500 kg / 15 000 kg
4 WD : 2 brakes / 4 brakes			
6600 kg (pneu) / 9000 kg (pneu) 8000 kg (hydr) / 12 000 kg (hydr)	10 500 kg / 16 000 kg	10 500 kg / 17 000 kg	10 500 kg / 15 000 kg



Black Bruin motors		B240 / 2WD	B240 / 4WD	B250 / 2WD	B250 / 4WD
Torque (gross)	1m/Nm	12	24	15-27	30-54
Working pressure	bar	250	250	250-280	250-280
Max drive speed with WD	km/h	~ 3-5	~ 3-5	~ 3-5	~ 3-5
Max freewheeling speed	km/h	30	30	30	30

DNIAR



TRAILER 237 | 500/50-17 | Ø 945

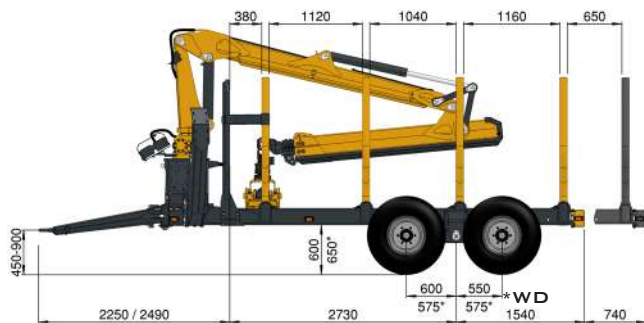



TRAILER 242 | 550/45-22,5 | Ø 1070

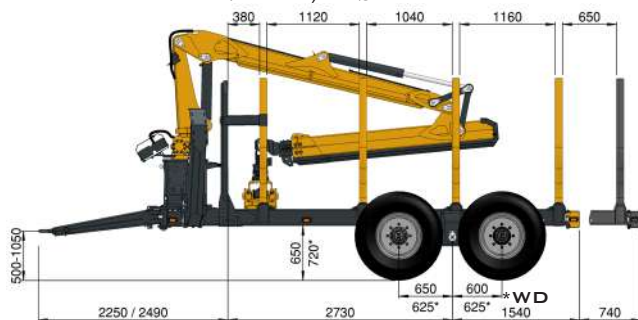

TRAILER 242R | 550/45-22,5 | Ø 1070

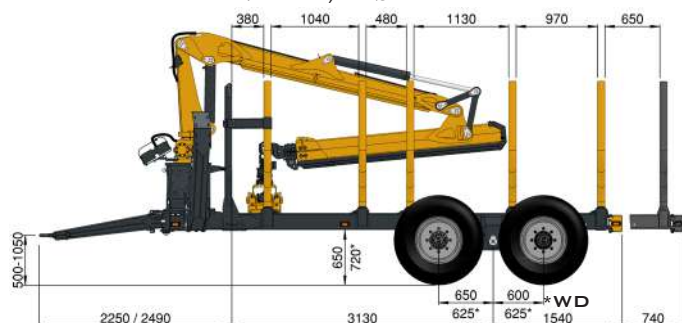



TRAILER 242R | FW | 550/45-22,5 | Ø 1070

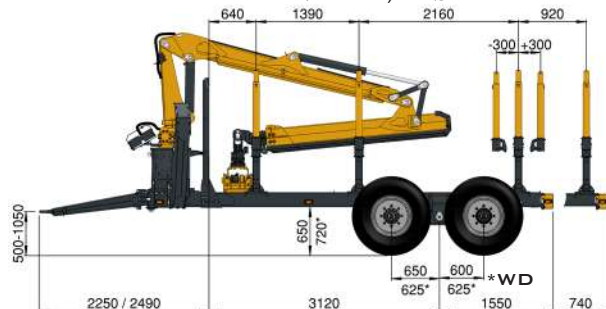



ONIA R

TRAILERS 237 / 242 / 246 - GROUP 2



TRAILER 246 | 600/50-22,5 | Ø 1170

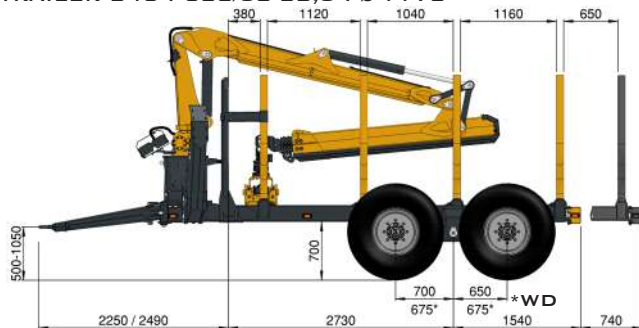



TRAILER 246R | 600/50-22,5 | Ø 1170

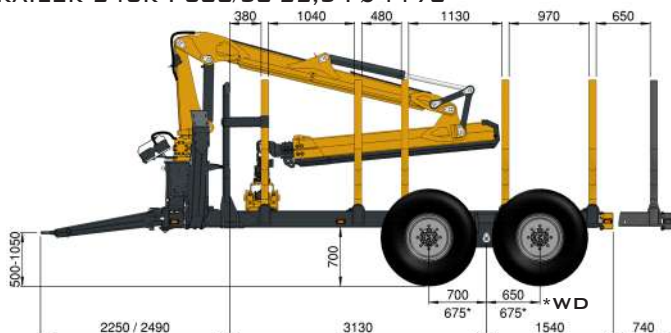

TRAILER 246R | FW | 600/50-22,5 | Ø 1170


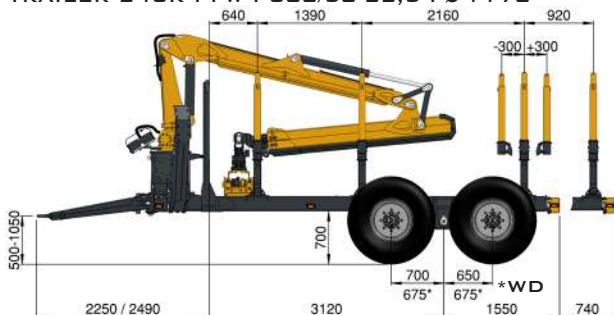


TRAILER 246E | 710/40-22,5 | Ø 1170


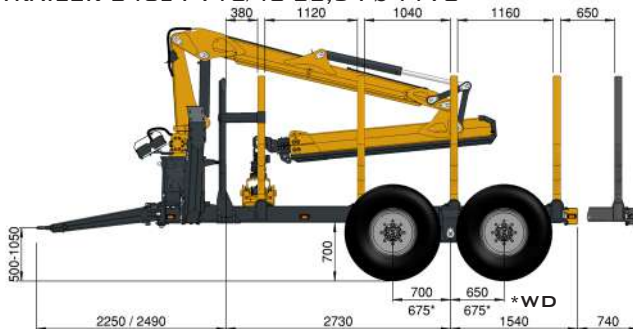


ONIA


TRAILER 246RE I 710/40-22,5 I Ø 1170

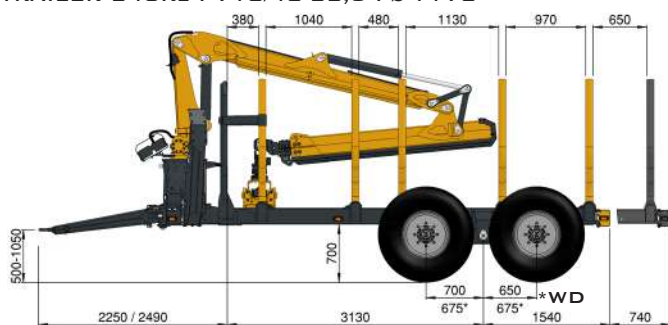

TRAILER 246RE I FW I 710/40-22,5 I Ø 1170

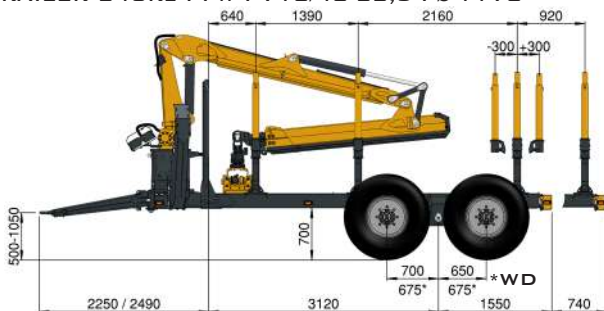

TRAILER 237 / 242 / 246 FRAME WITH EXTRA POLES

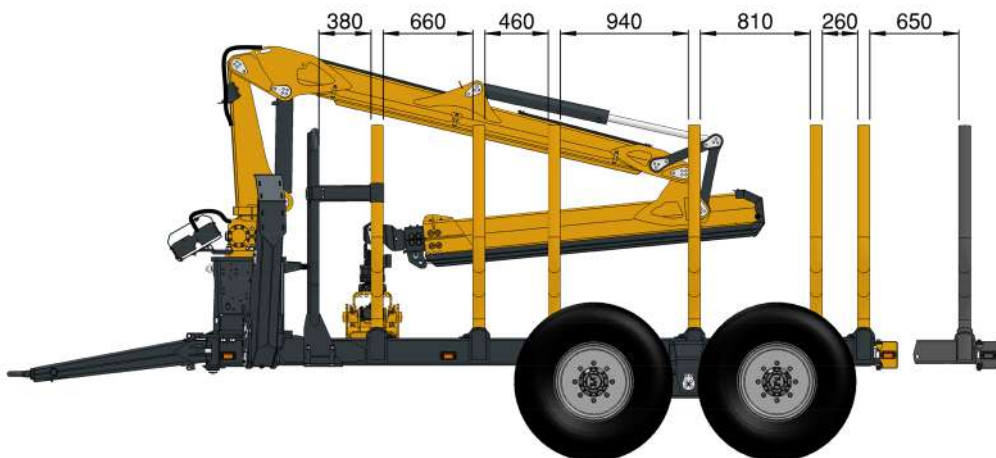

ONIA R

TRAILERS 237 / 242 / 246 - GROUP 2





Technical information		342 / 342 R	346 / 346 R	346 e / 346 Re
Frame type		Double beam extended (R)	Double beam extended (R)	Double beam extended (R)
Cross section of loading area - standard poles	m ²	3	3	3
Cross section of loading area - FW poles	m ²	2,8 - 5,6	2,8 - 5,6	2,8 - 5,6
Frame profile	mm	2x(250x150x8)	2x(250x150x8)	2x(250x150x8)
Wheel hubs	mm	90x90 - 8	100x100 - 8	100x100 - 8
Wheels		550/45-22,5	600/50-22,5	710/40-22,5 (e)
Suitable cranes		7500 / 8750 / 8800	7500 / 8750 / 8800	7500 / 8750 / 8800

Group 3 gross weight		
342 / 342 R	346 / 346 R	346 e / 346 Re
2 brakes / 4 brakes		
13 000 kg / 19 000 kg	13 000 kg / 20 500 kg	13 000 kg / 16 000 kg
2 WD front axle : 2 brakes / 4 brakes		
11 000 kg / 17 000 kg	11 000 kg / 18 000 kg	11 000 kg / 16 000 kg
2 WD rear axle : 2 brakes / 4 brakes		
13 000 kg / 17 000 kg	13 000 kg / 18 000 kg	13 000 kg / 16 000 kg
4 WD : 2 brakes / 4 brakes		
11 000 kg / 17 000 kg	11 000 kg / 18 000 kg	11 000 kg / 16 000 kg



Black Bruin motors		B240 / 2WD	B240 / 4WD	B250 / 2WD	B250 / 4WD
Torque (gross)	1m/Nm	12	24	15-27	30-54
Working pressure	bar	250	250	250-280	250-280
Max drive speed with WD	km/h	~ 3-5	~ 3-5	~ 3-5	~ 3-5
Max freewheeling speed	km/h	30	30	30	30

ONIAR



TRAILER 342 | 550/45-22,5 | Ø 1070

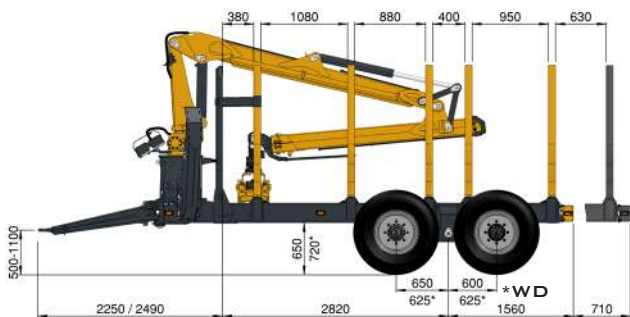



TRAILER 342R | 550/45-22,5 | Ø 1070

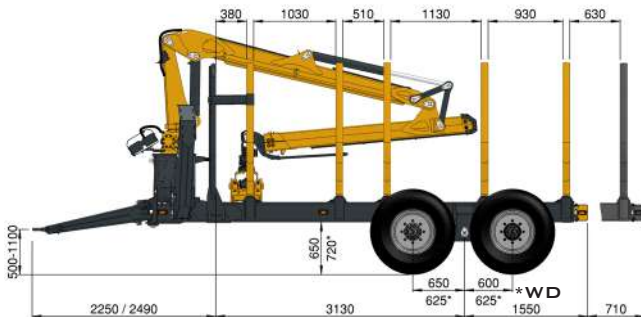

TRAILER 342 | FW | 550/45-22,5 | Ø 1070

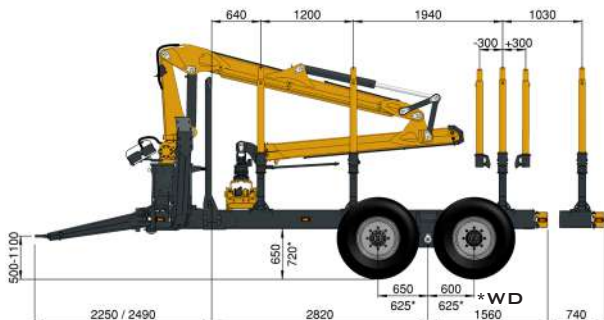



TRAILER 342R | FW | 550/45-22,5 | Ø 1070

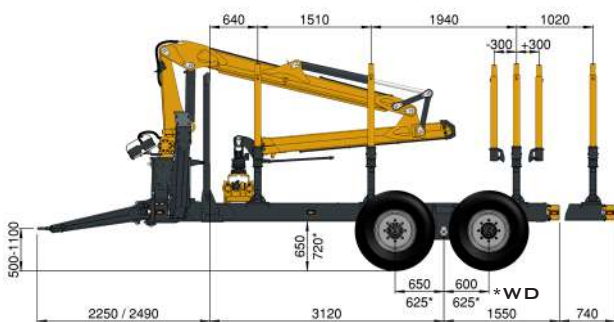



ONIA R

TRAILERS 342 / 346 - GROUP 3



TRAILER 346 I 600/50-22,5 I Ø 1170

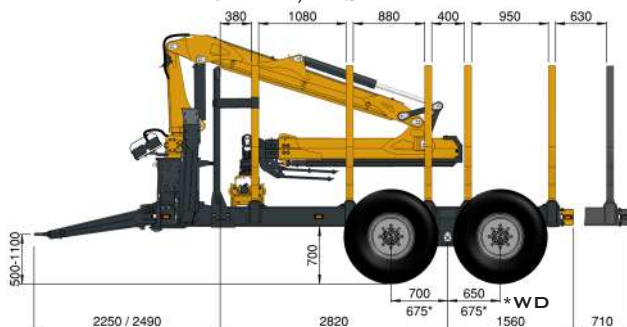



TRAILER 346R I 600/50-22,5 I Ø 1170

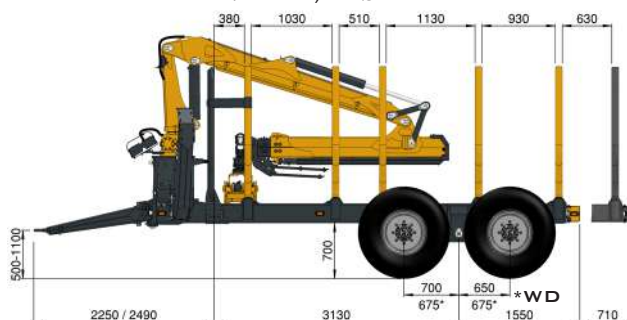

TRAILER 346E I 710/40-22,5 I Ø 1170


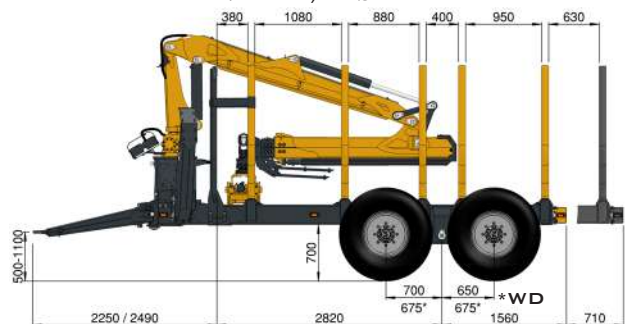


TRAILER 346RE I 710/40-22,5 I Ø 1170


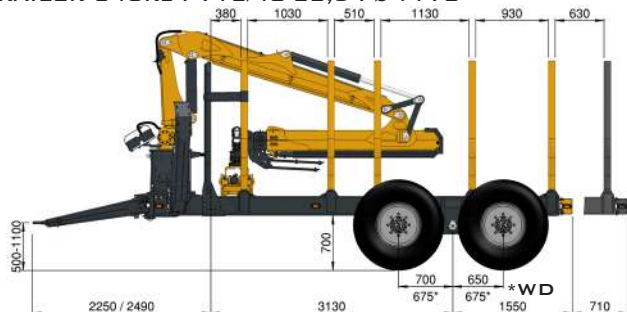


ONIA



TRAILER 346 I FW I 600/50-22,5 I Ø 1170

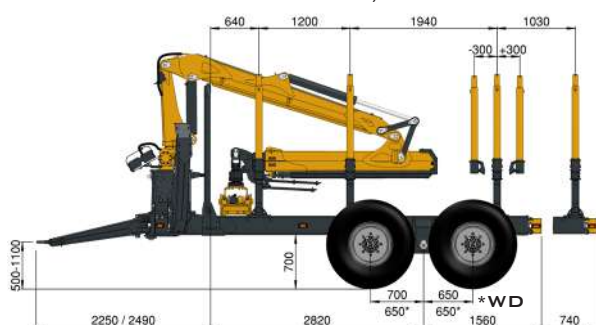



TRAILER 346R I FW I 600/50-22,5 I Ø 1170

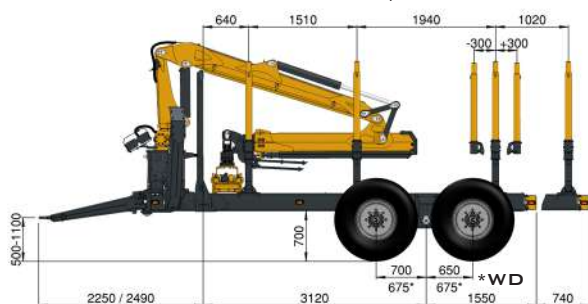

TRAILER 346E I FW I 710/40-22,5 I Ø 1170

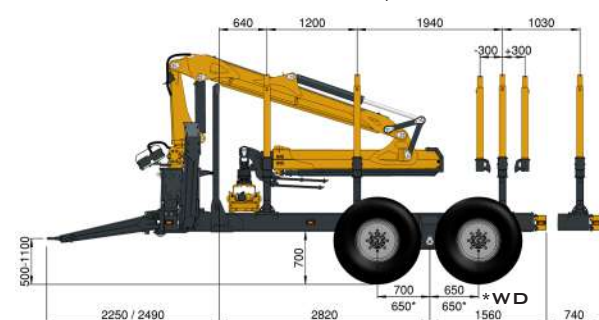


TRAILER 346RE I FW I 710/40-22,5 I Ø 1170

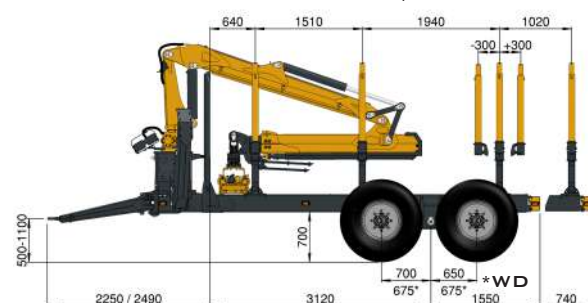


ONIA

TRAILERS 342 / 346 - GROUP 3

TRAILERS 342 / 346 FRAME WITH EXTRA POLES

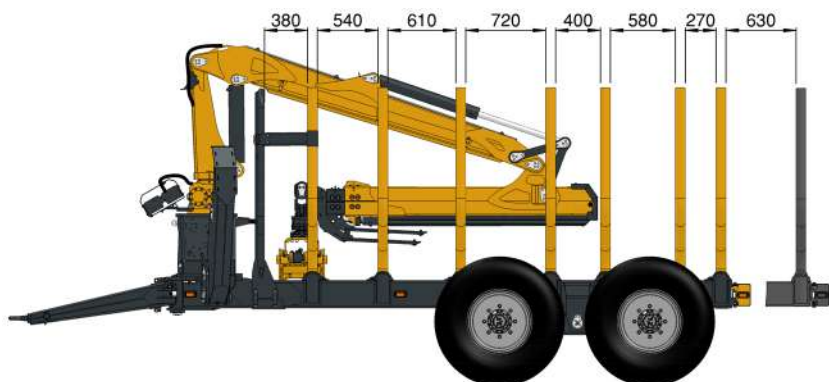

TRAILERS 342R / 346R EXTENDED FRAME WITH EXTRA POLES

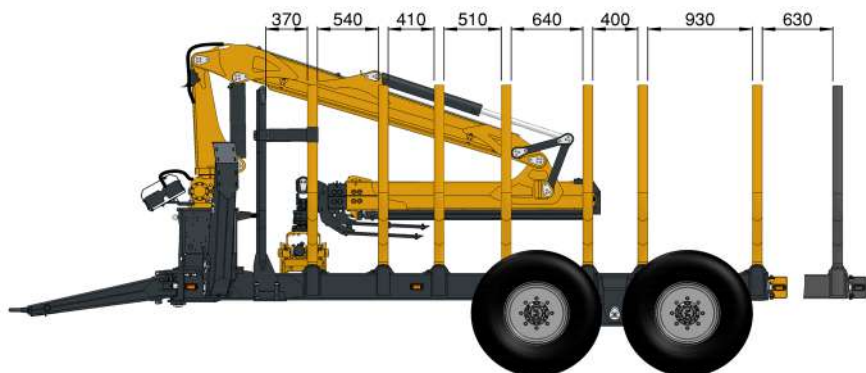


ONIAR



GROUP 0

2,1 m²

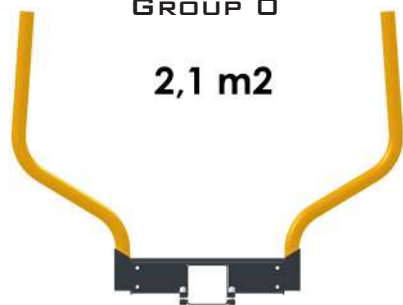

GROUP 1

2,3 m²



GROUP 2

2,6 m²



GROUP 3

3 m²




ONIAR

GROUP 2 POLES WITHOUT
LOAD AREA EXTENSIONS



WITH
POLE EXTENSIONS

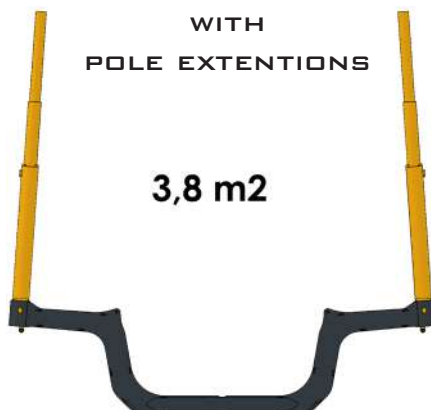

GROUP 2 POLES WITH LOAD
AREA EXTENSIONS



WITH
POLE EXTENSIONS



GROUP 2 POLES WITH LOAD
AREA EXTENSIONS IN THE
OPEN POSITION



WITH
POLE EXTENSIONS




GROUP 3 POLES WITHOUT
LOAD AREA EXTENSIONS



2,8 m2

WITH
POLE EXTENTIONS

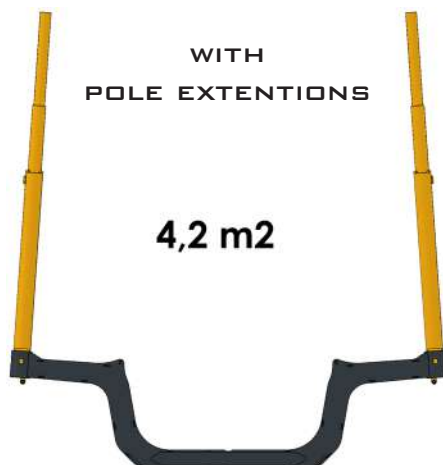

4,2 m2

GROUP 3 POLES WITH LOAD
AREA EXTENSIONS



3 m2

WITH
POLE EXTENTIONS



4,4 m2

GROUP 3 POLES WITH LOAD
AREA EXTENSIONS IN THE
OPEN POSITION



3,8 m2

WITH
POLE EXTENTIONS




5,6 m2




CRANES - 6800 / 8000



ONIAR

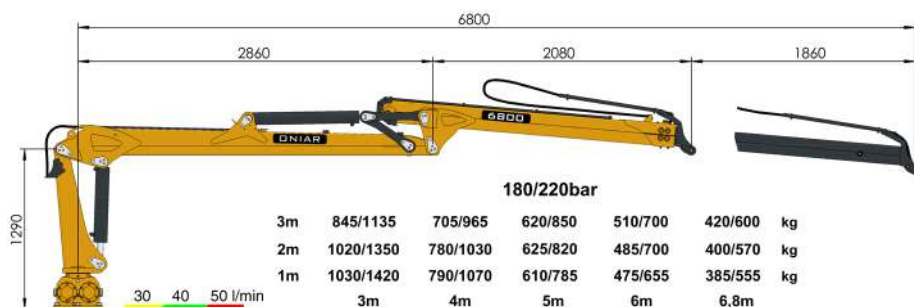

Technical information		6800	8000
Maximum reach	m	6,8	8,0
Work pressure	bar	180 / 220	180 / 220
Lifting force (gross)	kNm	48 / 60	48 / 60
Slewing torque (gross)	kNm	15,5 / 19	15,5 / 19
Optimal oil flow (FIX system)	l/min	30-45	30-45
Flange rotator	kNm	45	45
Suitable trailers		34 134 / 137 / 142 237 / 242 / 246	134 / 137 / 142 237 / 242 / 246
Suitable grapples		G18E / G20	G18E / G20

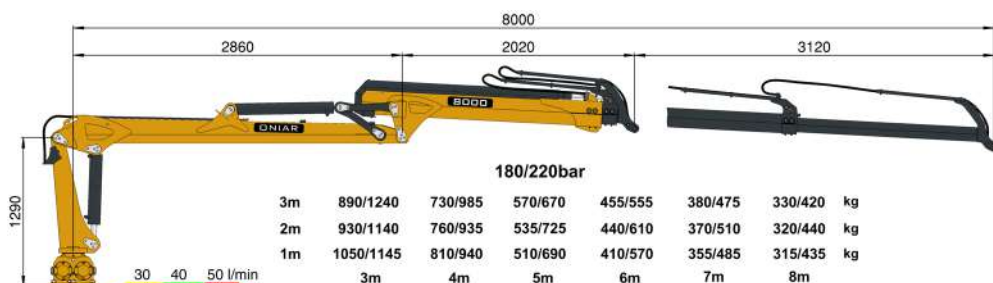



ONIAR

CRANES - 6800 / 8000


CRANES - 7500 / 8750 / 8800




ONIA

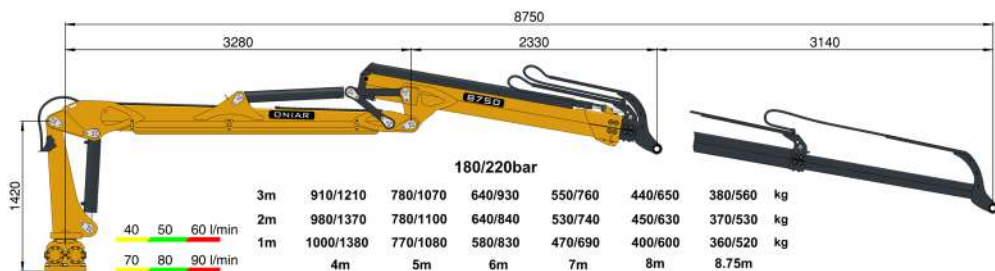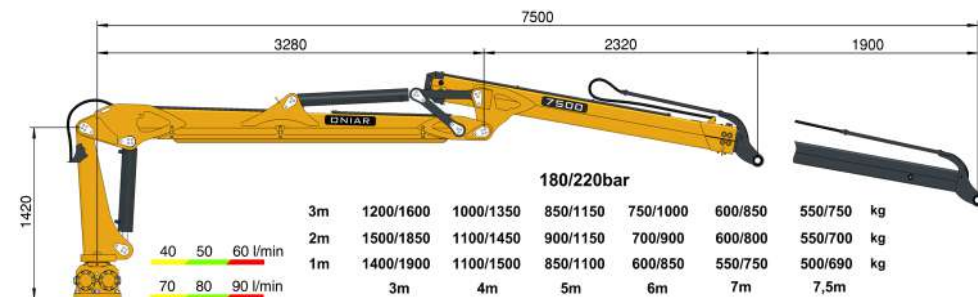

Technical information		7500	8750	8800
Maximum reach	m	7,5	8,75	8,8
Work pressure	bar	180 / 220	180 / 220	180 / 220
Lifting force (gross)	kNm	69 / 85	69 / 85	69 / 85
Slewing torque (gross)	kNm	21 / 26	21 / 26	21 / 26
Optimal oil flow (FIX system)	l/min	45-60	45-60	45-60
Optimal oil flow (LS system)	l/min	80	80	80
Flange rotator	kNm	55	55	55
Suitable trailers		137 / 142 237 / 242 / 246 342 / 346	142 242 / 246 342 / 346	142 242 / 246 342 / 346
Suitable grapples		G18E / G20 G22E / G24	G18E / G20 G22E / G24	G18E / G20 G22E / G24

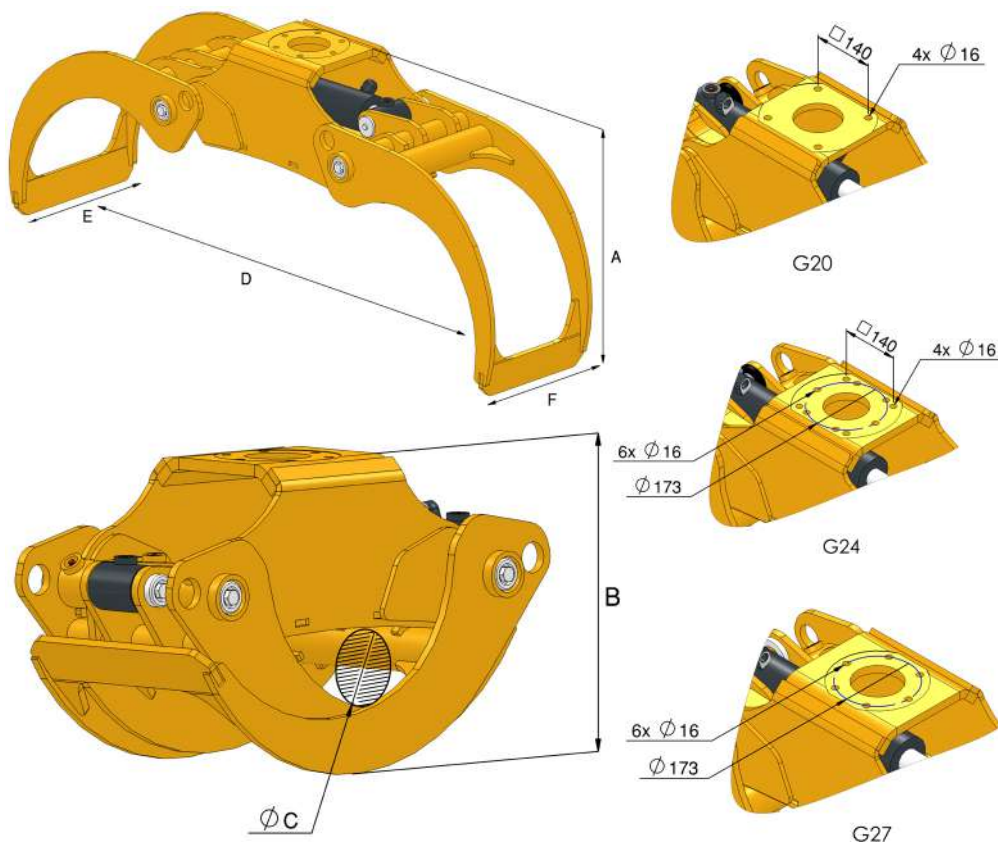

		G20 / G20H	G24 / G24H	G27 / G27H
A	mm	620	665	700
B	mm	435	490	505
C	mm	100	115	125
D	mm	1340	1470	1600
E	mm	362	392	412 / 443
F	mm	318	342	362
Weight	kg	130	180	195 / 215
Volume	m ³	0,20	0,24	0,27
Working pressure	bar	180-220	180-220	180-220
Gripping force	kN	7,6	11	13,4
Optimal oilflow	l/min	30	40	50

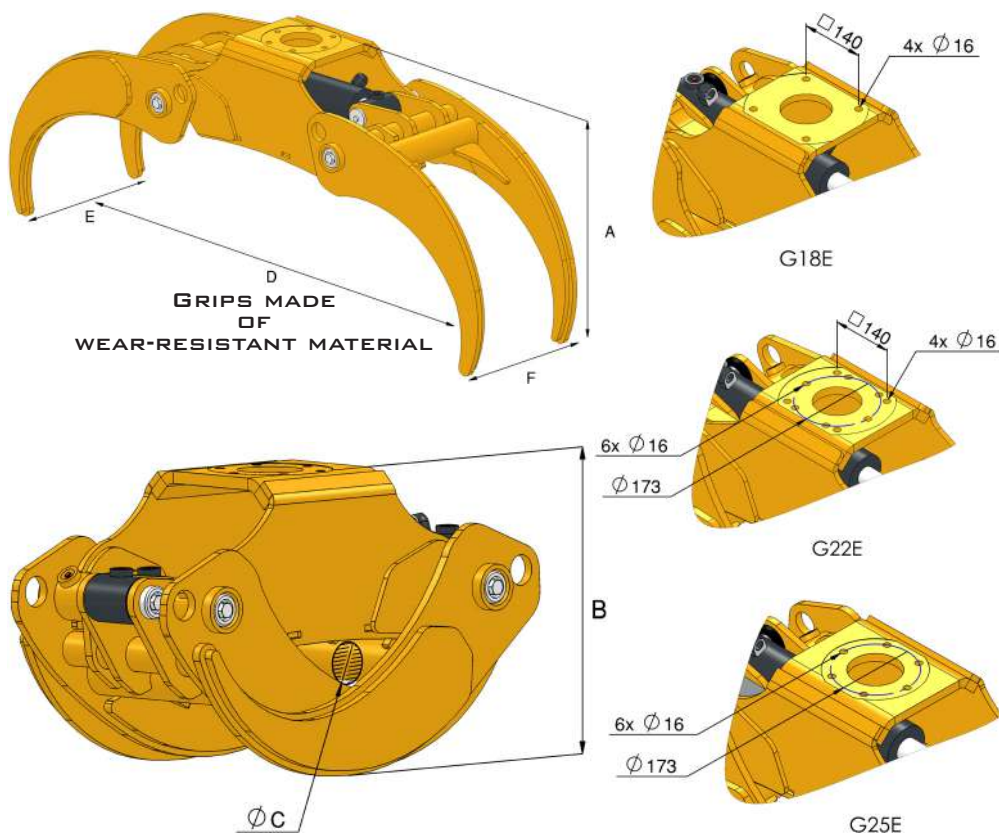

		G18E	G22E	G25E
A	mm	590	685	685
B	mm	435	490	490
C	mm	70	70	70
D	mm	1340	1470	1550
E	mm	390	430	450
F	mm	318	344	364
Weight	kg	140	215	230
Volume	m ²	0,18	0,22	0,25
Working pressure	bar	180-220	180-220	180-220
Gripping force	kN	7,6	11	13,4
Optimal oilflow	l/min	30	40	50







Nokian Forest King F2



Agricultural tire



Reinforced wheels with
valve protection



Forestry tire

	Nokian Forest King F2	Agricultural tire (flotation)	Forestry tire (traction)	Reinforced wheel
400/60-15,5	-	X	-	X
500/50-17	-	X	-	X
550/45-22,5	-	X	X	X
600/50-22,5	X	-	-	X
710/40-22,5	X	-	-	X



Driving system with Black Bruin motors 2WD / 4WD



Hydraulic brakes



Pneumatic brakes



Standing platform for control valve on drawbar with pump connection underneath



Frame extension

ONIAR



Telescopic tail lights



Foldable tail lights



Welded swivel towing eye Ø 50 mm



Bolted fix towing eye Ø 40 mm



Fix towing eye ball coupling Ø 80mm




Bolted fix towing eye Ø 50 mm

The drawbar with fix towing eye + ~250mm

The height of the drawbar hook can be selected based on the height of the tractor hitch

ONIA

FW TRAILER POLES & EXTENSIONS

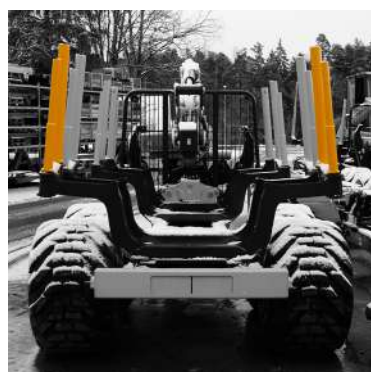

ONIAR



Valve block 4/8 XYZ control



**Valve block 4/8 XY control
ON-OFF**



**Valve block full electric
with mini joysticks
FIX / LS**



**Valve block 4/8 XY control
ON-OFF
with additional equipment**



Parker large joysticks (IP68S)



Radio remote control



V support legs



A support legs



Rotator with hose protection cover




Worklight



Main boom protection cover



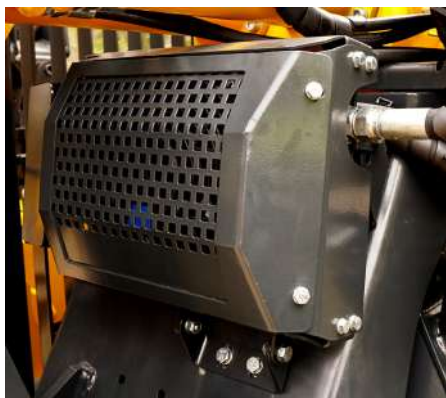

Cooler



Oil tank



Pistonpump & reductor in PTO



Protected pistonpump & reductor on drawbar



ONAR



Oniar OÜ | Pargi 16 | Märjamaa | Estonia



@OniarOfficial



@Oniarchannel

ONIAR

